


さかみち君（縦断勾配付横断側溝）

形状寸法



特長

- ・道路の縦断勾配 0%～16%に対応
（製品は 2%刻みに対応）
- ・勾配での段差が解消
（スムーズな走行が実現）
- ・T-25 対応でグレーチングはボルト固定
（普通目・細目に対応）

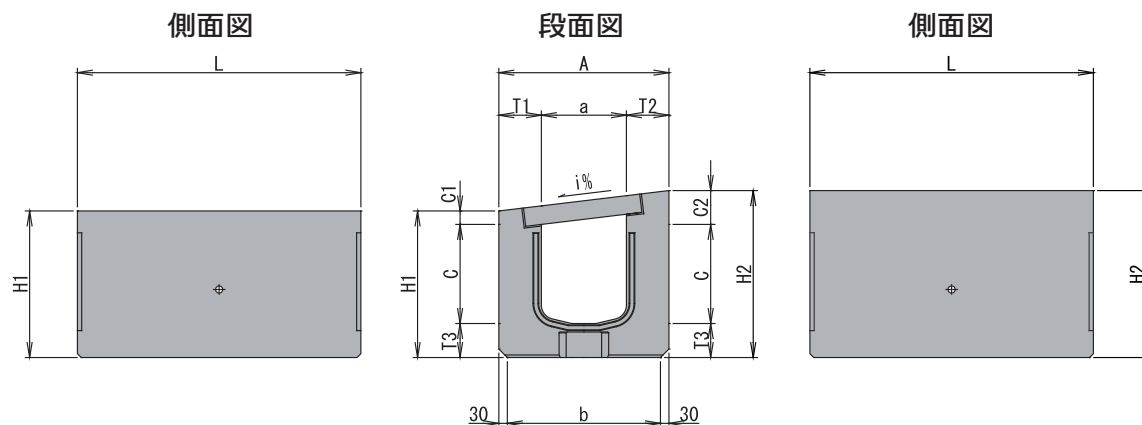

寸法重量表

呼び	縦断 勾配	寸法(mm)												参考重量 (kg)
		A	a	b	C	C1	C2	T1	T2	T3	H1	H2	L	
300×350	0%	600	300	540	350	65	65	150	150	120	535	535	1000	469
	2%	600	300	540	350	62	74	150	150	120	532	544	1000	471
	4%	600	300	540	350	59	83	150	150	120	529	553	1000	473
	6%	600	300	540	350	56	92	150	150	120	526	562	1000	475
	8%	600	300	540	350	53	101	150	150	120	523	571	1000	478
	10%	600	300	540	350	50	110	150	150	120	520	580	1000	480
	12%	600	300	540	350	47	120	150	150	120	517	589	1000	482
	14%	600	300	540	350	45	129	150	150	120	515	599	1000	484
	16%	600	300	540	350	42	138	150	150	120	512	608	1000	487
300×550	0%	600	300	540	550	65	65	150	150	120	735	735	1000	613
	2%	600	300	540	550	62	74	150	150	120	732	744	1000	615
	4%	600	300	540	550	59	83	150	150	120	729	753	1000	617
	6%	600	300	540	550	56	92	150	150	120	726	762	1000	619
	8%	600	300	540	550	53	101	150	150	120	723	771	1000	622
	10%	600	300	540	550	50	110	150	150	120	720	780	1000	624
	12%	600	300	540	550	47	120	150	150	120	717	789	1000	626
	14%	600	300	540	550	45	129	150	150	120	715	799	1000	628
	16%	600	300	540	550	42	138	150	150	120	712	808	1000	631
300×750	0%	600	300	540	750	65	65	150	150	140	955	955	1000	783
	2%	600	300	540	750	52	74	150	150	140	952	964	1000	785
	4%	600	300	540	750	59	83	150	150	140	949	973	1000	787
	6%	600	300	540	750	56	92	150	150	140	946	982	1000	789
	8%	600	300	540	750	53	101	150	150	140	943	991	1000	791
	10%	600	300	540	750	50	110	150	150	140	940	1000	1000	794
	12%	600	300	540	750	47	120	150	150	140	937	1010	1000	796
	14%	600	300	540	750	45	129	150	150	140	935	1019	1000	798
	16%	600	300	540	750	42	138	150	150	140	932	1028	1000	801

※グレーチング重量 36kg（普通目）

さかみち君（縦断勾配付横断側溝）

呼び	縦断 勾配	寸法(mm)												参考重量 (kg)
		A	a	b	C	C1	C2	T1	T2	T3	H1	H2	L	
400×450	0%	760	400	700	450	80	80	180	180	180	710	710	1000	780
	2%	760	400	700	450	76	92	180	180	180	706	722	1000	784
	4%	760	400	700	450	73	103	180	180	180	703	733	1000	787
	6%	760	400	700	450	69	115	180	180	180	699	745	1000	791
	8%	760	400	700	450	66	127	180	180	180	696	757	1000	794
	10%	760	400	700	450	62	138	180	180	180	692	768	1000	798
	12%	760	400	700	450	59	150	180	180	180	689	780	1000	801
	14%	760	400	700	450	56	162	180	180	180	686	792	1000	805
	16%	760	400	700	450	52	174	180	180	180	682	804	1000	809
400×650	0%	760	400	700	650	80	80	180	180	180	910	910	1000	953
	2%	760	400	700	650	76	92	180	180	180	906	922	1000	957
	4%	760	400	700	650	73	103	180	180	180	903	933	1000	960
	6%	760	400	700	650	69	115	180	180	180	899	945	1000	963
	8%	760	400	700	650	66	127	180	180	180	896	957	1000	967
	10%	760	400	700	650	62	138	180	180	180	892	968	1000	970
	12%	760	400	700	650	59	150	180	180	180	889	980	1000	974
	14%	760	400	700	650	56	162	180	180	180	886	992	1000	978
	16%	760	400	700	650	52	174	180	180	180	882	1004	1000	981
400×900	0%	760	400	700	900	80	80	180	180	180	1160	1160	1000	1168
	2%	760	400	700	900	76	92	180	180	180	1156	1172	1000	1172
	4%	760	400	700	900	73	103	180	180	180	1153	1183	1000	1176
	6%	760	400	700	900	69	115	180	180	180	1149	1195	1000	1179
	8%	760	400	700	900	66	127	180	180	180	1146	1207	1000	1183
	10%	760	400	700	900	62	138	180	180	180	1142	1218	1000	1186
	12%	760	400	700	900	59	150	180	180	180	1139	1230	1000	1190
	14%	760	400	700	900	56	162	180	180	180	1136	1242	1000	1194
	16%	760	400	700	900	52	174	180	180	180	1132	1254	1000	1197

※グレーチング重量 52kg（普通目）

呼び	縦断 勾配	寸法(mm)												参考重量 (kg)
		A	a	b	C	C1	C2	T1	T2	T3	H1	H2	L	
500×550	0%	860	500	800	550	90	90	180	180	180	820	820	1000	916
	2%	860	500	800	550	86	104	180	180	180	816	834	1000	921
	4%	860	500	800	550	83	117	180	180	180	813	847	1000	925
	6%	860	500	800	550	79	131	180	180	180	809	861	1000	929
	8%	860	500	800	550	76	145	180	180	180	806	875	1000	934
	10%	860	500	800	550	72	158	180	180	180	802	888	1000	938
	12%	860	500	800	550	69	172	180	180	180	799	902	1000	943
	14%	860	500	800	550	66	186	180	180	180	796	916	1000	947
	16%	860	500	800	550	62	200	180	180	180	792	930	1000	952
500×750	0%	860	500	800	750	90	90	180	180	180	1020	1020	1000	1089
	2%	860	500	800	750	86	104	180	180	180	1016	1034	1000	1094
	4%	860	500	800	750	83	117	180	180	180	1013	1047	1000	1098
	6%	860	500	800	750	79	131	180	180	180	1009	1061	1000	1102
	8%	860	500	800	750	76	145	180	180	180	1006	1075	1000	1107
	10%	860	500	800	750	72	158	180	180	180	1002	1088	1000	1111
	12%	860	500	800	750	69	172	180	180	180	999	1102	1000	1116
	14%	860	500	800	750	66	186	180	180	180	996	1116	1000	1120
	16%	860	500	800	750	62	200	180	180	180	992	1130	1000	1125
500×1000	0%	860	500	800	1000	90	90	180	180	180	1270	1270	1000	1305
	2%	860	500	800	1000	86	104	180	180	180	1266	1284	1000	1310
	4%	860	500	800	1000	83	117	180	180	180	1263	1297	1000	1314
	6%	860	500	800	1000	79	131	180	180	180	1259	1311	1000	1318
	8%	860	500	800	1000	76	145	180	180	180	1256	1325	1000	1323
	10%	860	500	800	1000	72	158	180	180	180	1252	1338	1000	1327
	12%	860	500	800	1000	69	172	180	180	180	1249	1352	1000	1332
	14%	860	500	800	1000	66	186	180	180	180	1246	1366	1000	1336
	16%	860	500	800	1000	62	200	180	180	180	1242	1380	1000	1341

※グレーチング重量 71kg（普通目）